

## LESIRE CREDENZA ASSEMBLY

Notes;

1. Delivery is done in a wooden crate. Opening the crate will require use of an electric screw driver.
2. The Lesire storage is heavy and requires at least 4 people who are able to lift heavy loads to place it in position.
3. The lesire credenza is delivered with its 4 legs detached. The loose legs are delivered inside the credenza.
4. The 4 legs do not require any tools to fit. Each leg has a bolt that protrudes from the top of the leg. Each leg protruding bolt corresponds with a metal threaded hole on the underside of the credenza bottom, into which each leg will be fitted in a rotational, screwing motion by hand.

Step 1-

The crate is to be stood upright after it is delivered at all times. Within the crate, the credenza lies on its back with the doors facing up.

To open the crate, start by dismantling the crate, removing all panels (top and all sides), unscrewing the crate screws with an electric screw driver, leaving the credenza on the crate bottom. Do not lift the credenza yet from the bottom of the now open crate.

Step 2.

While the wrapped credenza is still on the crate bottom on its back, carefully remove all packaging material from the credenza until sides, top, doors and credenza bottom are fully exposed.

Carefully open the credenza middle door by pushing down and letting go in a quick motion, on the top corner of the door, as the doors open with a "push to open" method. When the door is partially opened, swing open the door carefully in an upward motion (as the cabinet is on its back). Be careful to keep the door supported so that it does not slam shut due to gravity as it is in its lying position.

While supporting the open door, reach inside the credenza to remove the 4 loose legs placed inside the credenza.

Step 3.

Carefully unwrap each leg fully.

Visually locate the fixing holes on the cabinet underside. Take one leg and push the leg protruding bolt onto the metal bracket hole. When in position at the mouth of the hole, start to rotate the leg into the threaded metal hole in a clockwise motion, making sure the threads on the leg bolt and the fixing bracket hole, are aligned and rotating into each other smoothly. Rotate the leg several times until it is as tight as possible by hand. Repeat this process for all 4 legs.

Step 4.

With at least 4 people capable of lifting very heavy loads, lift the credenza (in an upward motion first) away from the crate bottom and then proceed to move to the final credenza placement position at the final chosen position within the space. Carefully rotate the credenza upright fully before placing it on the floor. It is very important that all 4 legs make contact with the floor at the same time to avoid damage.

### **Door opening and closing:**


To open credenza doors, push each door at the top opening corner of the door, in a kind of push/tapping motion, for it to partially open. Once partially opened, swing the door open from the top edge as there are no visible handles.

To close the door, gently push the door to close. Do not slam the door shut, gently but firmly, push it closed to the final closing position.

### **Maintenance:**

Avoid exposing the credenza to direct sunlight.

Once or twice a year depending on usage, apply a good quality danish oil on the cabinet to maintain the natural wood finish.

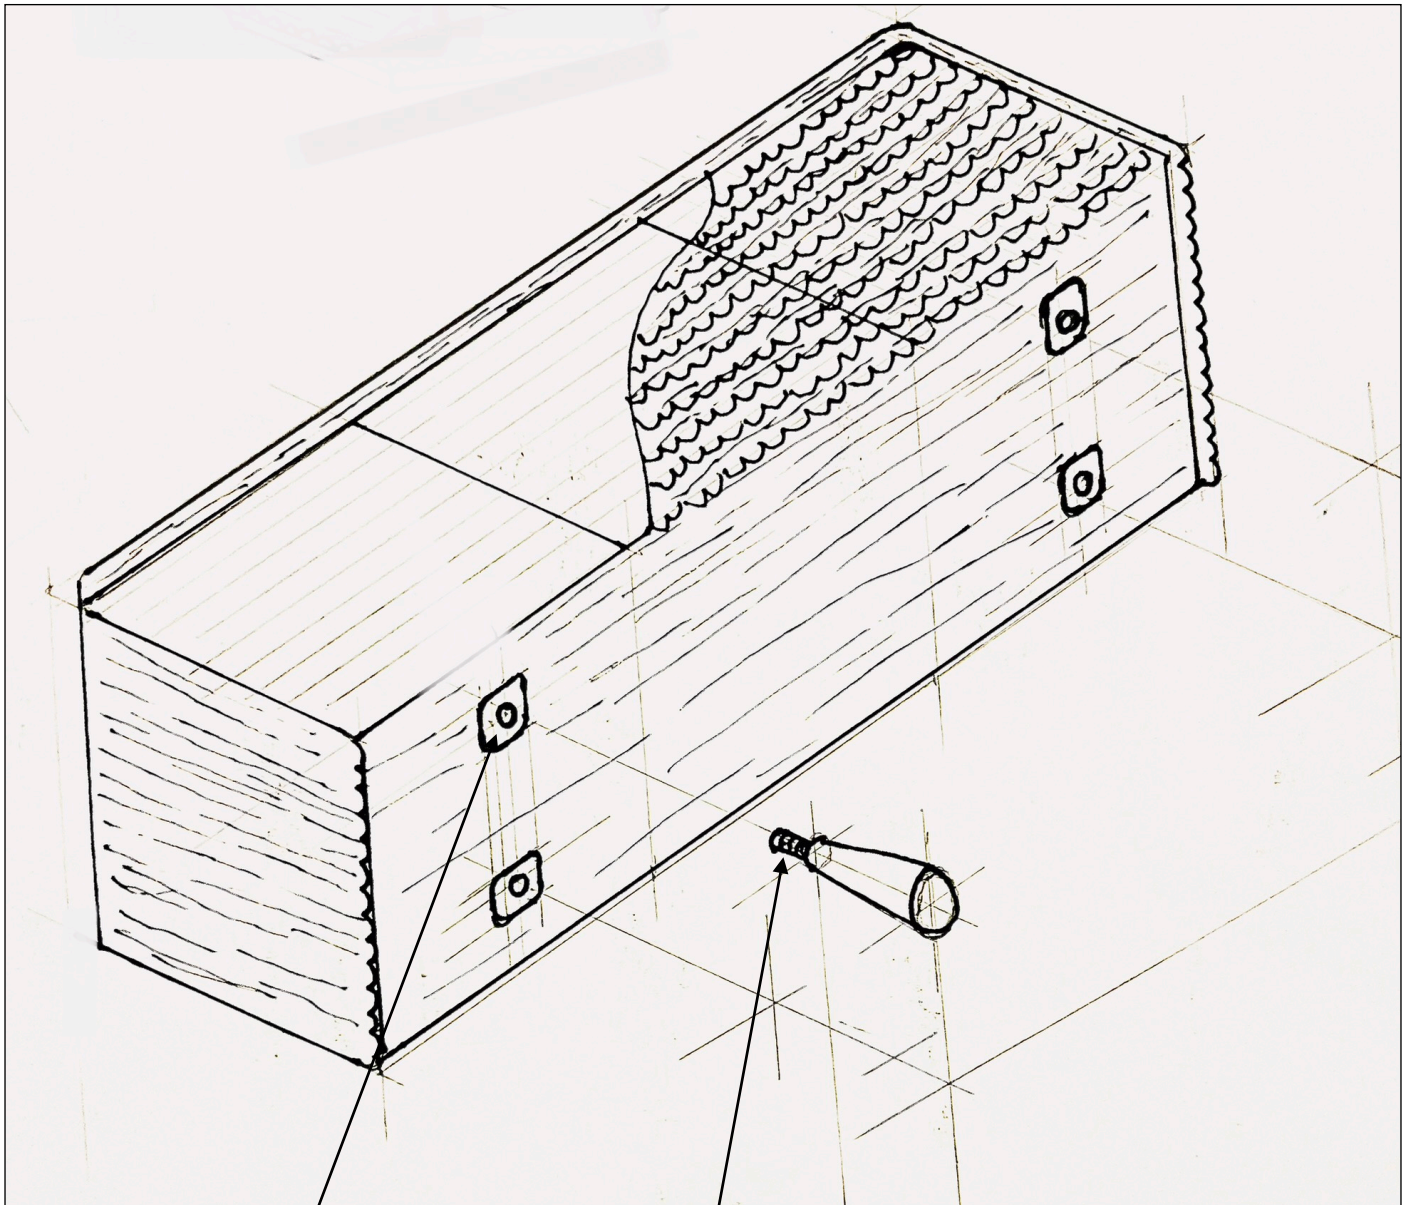

Leg Fixing Bracket hole

Protruding leg bolt